

1035 CPE



Product Snapshot

Proxim's Edge 1035 CPE combines value, toughness, and exceptional performance in an IP67 rated metal enclosure to guarantee long service life.

When paired with the MP-10250 or MP-10100 Base-stations, it creates an ideal multipoint access solution.

- Wide Band 5 GHz Radio
- 2x2 MIMO radio delivering up to 380 Mbps¹
- Advanced QoS for quad-play applications
- AES 128 encryption and Radius authentication

Powered by WORP[®]

Proxim WORP enables the most efficient wireless broadband access possible in a packet-based network. Advanced QoS controls, committed interface rates, latency controls, IGMP snooping, and native multicast support allow granular service level management and the best video performance available in this product class.

Advanced Interference Management

Proxim ClearConnect[™] combines multiple dynamic technologies and delivers the best interference management solution available.

Rugged Reliability

IP67 rated metal enclosure to ensure years of reliable service in harsh environments, including high winds, high salt, and temperature extremes.

Secure

AES 128 encryption with Radius based authentication, and secure management through SSL/TLS1.2, SSH, and SNMPv3.

Extended Reach

Integrated 15 dBi 35-degree dual-polarity antenna.

*Note: the 1035 CPE is only available in a 6 unit pack,
 1. 380 Mbps requires 80 MHz channel license upgrade.

Specifications

PRODUCT MODELS

MP-1035-CPE-WD Edge Multipoint 1035, Customer Premise Equipment, 300 Mbps, integrated antenna – WD 6 pack PN: 901-00369

INTERFACES

WIRED ETHERNET One auto MDI-X RJ45 10/100/1000Mbps Ethernet with PoE in
 WIRELESS PROTOCOL WORP® (Wireless Outdoor Router Protocol)

RADIO & TX SPECS

MIMO 2x2:2
 MODULATION OFDM BPSK-QAM256
 FREQUENCY 5.150 – 5.925 GHz (Subject to Country Regulations)
 CHANNEL SIZE 20 and 40 MHz (license upgrade to 80 MHz)
 TX POWER Up to 24 dBm (dual chain)
 TX POWER CONTROL 0 - 21 dB, in 1 dB steps. Automatic TPC with configurable EIRP limit

	20 MHz	40 MHz	REQUIRES LICENSE UPGRADE 80 MHz
TX POWER	MCS0:	MCS0:	MCS0:
2 RF	24	23	21
	MCS8:	MCS9:	MCS9:
2 RF	19	18	17
RX SENSITIVITY (Per=10 ⁻⁶)	MCS0:	MCS0:	MCS0:
	-89	-86	-84
	MCS8:	MCS9:	MCS9:
	-67	-62	-59
Throughput-MIMO 2x2 Mode	122 Mbps	294 Mbps	380 Mbps
OTHER	Dynamic Channel Selection (DCS) based on interference detection, Dynamic Frequency Selection (DFS) based on radar signature		
	Automatic Transmit Power Control (ATPC) with EIRP limit support		

MANAGEMENT

REMOTE Telnet and SSH, Web GUI and SSL/TLS1.2, TFTP, SNMPv3
 SNMP SNMP v1-v2c-v3, RFC-1213, RFC-1215, RFC-2790, RFC-2571, RFC-3412, RFC-3414, Private MIB
 OTHER Syslog, sFlow™ agent, SNTP and local time, Spectrum analyzer
 Multi-Language Support Web Interface available in English, French, Spanish and Chinese


SECURITY

ENCRYPTION AES 128
 AUTHENTICATION Internal MAC Address Control List, Radius based Authentication (with VLAN and QoS provisioning)

ANTENNA

Integrated 2x2 MIMO 15 dBi Dual Polarized 35 degree Panel Antenna

ANTENNA PATTERNS (Sector Mode)

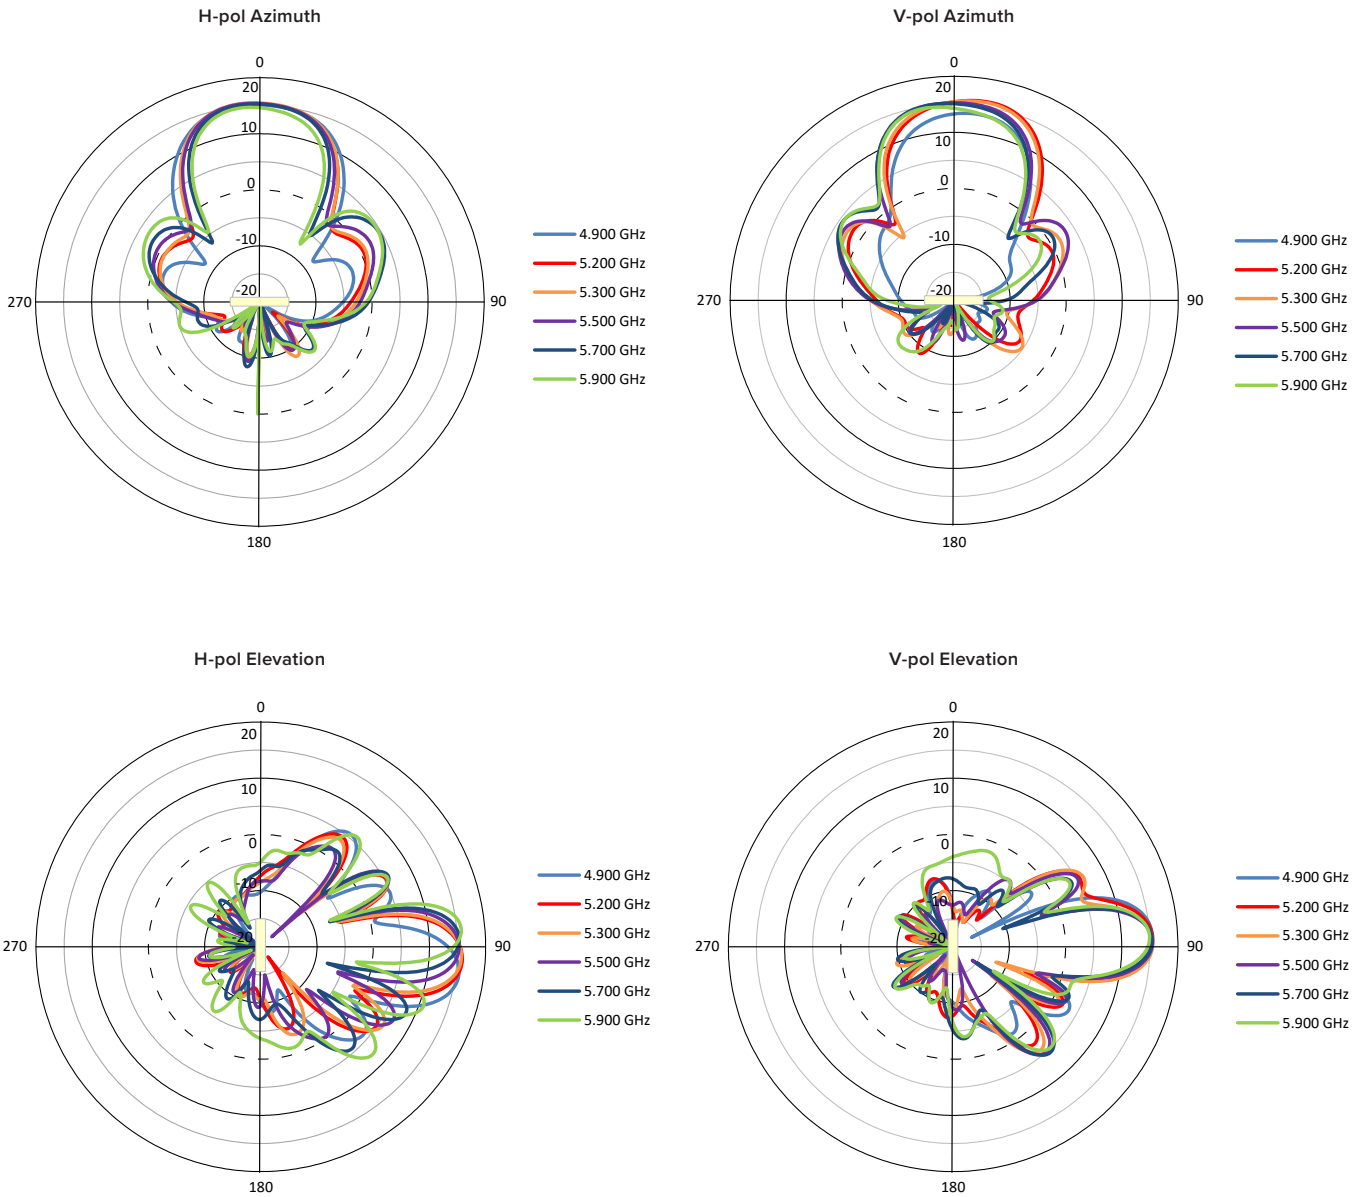

QoS

Asymmetric Bandwidth Control	Asymmetric UL/DL committed and maximum information rate per service flow
Packet Classification Capabilities	802.1p priority, IPTOS, VLAN ID, IP addresses, ports, Ethernet addresses, IP protocol, and EtherType
Scheduling	Best Effort, Real Time Polling Services

NETWORK

MODES	Bridging, Routing (RIP v2 and IP tunneling)
IP STACK	IPv4 and IPv6 simultaneously
GATEWAY FEATURES	DHCP Server & relay, NAT with Std ALGs, PPPoE end point with Proxy DNS
VLAN	802.1Q: Management VLAN. Transparent, Access, Trunk and Mixed mode. QinQ double tagging

POWER

802.3af/at compliant

POWER CONSUMPTION

10 W typical, 12 W max

ENVIRONMENTAL SPECS	OPERATING TEMPERATURE	STORAGE TEMPERATURE	HUMIDITY - IP RATING	WIND LOADING
	-30° to 55° Celsius (-22° to 131° Fahrenheit)	-50° to 70° Celsius (-58° to 158° Fahrenheit)	100% relative humidity– IP67	180 km/h (112.5 mph)
PHYSICAL SPECS	DIMENSIONS (PACK OF 6 UNITS)	DIMENSIONS (UNPACKAGED)	WEIGHT (PACK OF 6 UNITS)	WEIGHT (UNPACKAGED)
MP-1035-CPE	402 x 334 x 254 mm (15.83 x 13.15 x 10 in)	170 x 217 x 56 mm (6.7 x 8.55 x 2.2 in)	13.60 kg (30.0 lbs)	1.19 kg (2.62 lbs)

SAFETY STANDARDS

IEC 62368-1:2014 & 60950-22:2016
CAN/CSA C22.2 No 62368-1:14 & No 60950-22:17
EN 62368-1:2014 + A11:2017 & 60950-22:2017

CERTIFICATIONS

CANADA RSS-247 issue 2, RSS-102 issue 5, ICES-003 issue 7
EUROPE RED EN 301 489-1 + EN 301 489-17 + EN 300 328 + EN 301 893 + EN 302 502

PACKAGE CONTENTS (pack of six units)

- Six Edge MP-1035-CPE with integrated antenna
- Six M25 weather proofing cable gland
- Six pair of hose clamps
- One Quick Installation Guide

MTBF & WARRANTY

>250 000 hours, 2-year warranty, ServPak Extended Support available.

ABOUT PROXIM WIRELESS :

Proxim Wireless is a global leader in advanced wireless broadband and WiFi solutions that deliver high performance and high availability communications. Celebrating 40 years of pioneering wireless solutions, Proxim is recognized for unparalleled reliability, superior performance, and drive for innovation.

© 2022 Proxim Wireless Corporation. All rights reserved. Proxim is a registered trademark and the Proxim logo is a trademark of Proxim Wireless Corporation. All other trademarks mentioned herein are property of their respective owners. Specifications are subject to change without notice.